



**File Name:** Bt versatility v8 manual.pdf

**Size:** 1687 KB

**Type:** PDF, ePub, eBook

**Category:** Book

**Uploaded:** 5 May 2019, 23:23 PM

**Rating:** 4.6/5 from 846 votes.

**Download Now!**

Please check the box below to proceed.



I'm not a robot



reCAPTCHA  
Privacy - Terms

## Book Descriptions:

# Bt versatility v8 manual



Please click Accept Cookies to continue to use the site. The Versatility V8 has a number of keys which are either programmed as line keys or Feature keys. The next key is the Handsfree Key with a light indicator. This key does what it says it allows you to talk Handsfree, press it twice and the handsfree feature switches off. The next two keys are the volume UP or DOWN keys, this will allow you to increase or decrease the volume depending on what you are doing such as talking to a caller or hearing the phone ring. You then have a simple indicator on the far right which lights up when you have Voice Message. The BT Versatility V8 Phone is only compatible with the BT Versatility Telephone system. The BT Versatility V8 Phone is not suitable for home use. We are probably the cheapest site for the Versatility V8 phone. BT Versatility V8 Telephone Features Handsfree capability on the V8 Offering superb audio quality in both handset and handsfree mode, these phones allow you to carry on a conversation without having to pick up the phone. Menudriven interface on your V8 Simple menus guide you every step of the way and can help even the occasional user to get things done better and faster than before. Programmable keys on the V8 These can be programmed as lines, extensions or frequently used features. Everything you need can be accessed with just one key. Onetouch keys These provide shortcuts to everyday features and functions, including Headset port Automatically detects when a headset is connected. Ideal for receptionists and other users who spend most of their time on the phone. Great for people who need to keep their hands free to access files or use their PC while on calls. Modem port Allows additional analogue devices to be connected, including modems and DECT digital enhanced cordless telecommunications extensions. Calling Line Identification Your Featurephone display can tell you who is calling. <http://www.exotichuntingandfishingadventures.com/dbx-160-manual.xml>

- **bt versatility v8 manual, bt versatility v8 featurephone manual, bt versatility v8 installation manual, bt versatility v8 manual, bt versatility v8 manual, bt versatility v8 manual download, bt versatility v8 manual pdf, bt versatility v8 manual free, bt versatility v8 manual transmission.**




It will show the caller's number or extension and for callers listed in the system directory, it can also display the caller's name. Other frequently used features Well packaged in box. Very good service The reconditioned telecoms products I purchased were perfect and were excellent value. Will definitely be coming back again. BT Versatility Business. Featurephones. Part of our Telephony portfolio. A range of system telephones to suit every business need whether for officeIs it for you Benefits and features. With a range of sets including the V Phone, V8. V16, XP expansion console, and the internetOffering superb audio quality in both handsetLooking for a choice of phones that make it easy to get the most from your BT. Versatility systemThere's no need for training and every user is quickly able to set their phone up toAnd now you can promoteVIP Featurephone. Menudriven interface. Autoanswer mode. Simple menus guide you every step of theA backlit key for each line connected to theYou can pick up a call without having toProgrammable keys. Automatically detects when a headset isThese can be programmed as lines,Everything you need can be accessed withOnetouch keys. These provide shortcuts to everyday featuresAllows additional analogue devices to beCall indicatorCalling Line Identification. Your Featurephone display can tell you whoMaking sense in a confusing marketplaceOther frequently used features. Remote extensions. With the help of the Broadband Module. PLUS you can use the VIP Featurephone toBT Versatility Featurephones operate with allAdditional options. The V16 display can be backlit when usedPhone options. V16 and V8 Featurephone. Functions at a glance. V16 Featurephone. A sophisticated phone with a large, backlitV16 XP console. Adds on an extra 32 programmable keys toGreat phones for everyday use, with simpleSimilar in function to the V16 and lets usersThe VIP is used in conjunction with the BT. Versatility Broadband Module PLUS andVIP Featurephone.<http://www.norbertov.cz/UserFiles/dbx-131-service-manual.xml>



Functions at a glance Ideal for occasional use in warehouses, Flexible maintenance contracts. Service and support. Why BT Eighttofive, or around the clock, all year. We have the service assurance packages to In addition to our flexible maintenance Software crashes, installation problems and Is it the hardware Is it software Is it a virus Who knows With IT Support Manager ITSM All your IT requirements can be covered. From installing, configuring and repairing We have the capability to deliver and Standard Care Prompt Care Total Care Finance options. If you want to minimise your capital outlay, As well as being BT Finance is a registered trademark of British. Telecommunications plc, used under licence by a panel of. Funder and Banks which includes GE Capital Equipment. Finance Ltd, 2630 the Quadrant, Aztec West, Bristol Plus lifelong support for your solution Offices worldwide. The services described in this publication are subject to availability Services and equipment Nothing in this publication forms Registered office 81 Newgate Street, London EC1A 7AJ. Registered in England No. 1800000. Quoting 46988 Produced by BT Global Services. To ensure long term reliability of the system, electrostatic precautions should be taken when handling any of the system PCBs that are not enclosed in plastic. An ESP pillar is located on the CCU MDF. It needs to be mounted at a convenient working height on a dry, flat wall. The normal height is 1.5 m from the floor to the bottom of the CCU case. CCU Mounting Bracket 300mm If the system is to be equipped with a Ports, Options or Internet module then two mounting brackets need to be installed. Slide the CCU to the left to remove it from the bracket. Installation and Maintenance Manual 300mm min Flanges BT Versatility. This provides 2 Analogue exchange lines. Up to two of these modules can be installed in the CCU to provide two or four Analogue lines. The power must be disconnected to install the backplane or expansion modules.

Ensure the connector is fully mated with the CCU. Securing the backplane to the wall bracket A mounting screw is used to securely locate the backplane on the wall bracket. This provides additional rigidity to ensure the backplane and CCU connectors do not move. The power must be disconnected when installing the Backplane or expansion modules Module with MDF Module and MDF separated BT Versatility Installation and Maintenance Manual. Install the MDF in the first free lefthand slot on the backplane. Lock the MDF in place by pushing the lock bar upward using a screwdriver. Insert the Analogue module in the Network slot or slots in the CCU. The left hand slot is the first module position Remove the cover. Installation and Maintenance Manual Locate the Module BT Versatility First network module. The module is coloured RED, and can be installed in the CCU and also in the Ports MDF. The BT Versatility S interface emulates the Network Terminating Equipment NTE and consequently is always terminated with 100 ohm resistance. There are two versions. Two Port with 2 hours capacity, 4 port with 4 hour capacity and 8 port with 20 hours capacity. The battery will support 11 erlangs of voice traffic for 40 minutes. This provides 32

additional programmable keys. Up to eight V16 featurephones can be equipped with this module. From the system programming menus you program which extensions are equipped with this module. Locate, drill and plug the 2 screw locations as shown below. The holes should be deep enough to accept a 2.5 cm screw. The system must be programmed to recognise the Door intercom. Refer to the BT Versatility Owners manual for programming details. Door intercom bracket. Spare wires must be neatly laid back away from the connectors. To prevent cross talk or interference, cable pairs should not be split or the spare wire of cable pairs used. See page 49 for basic router programming. BT Versatility Installation and Maintenance Manual.

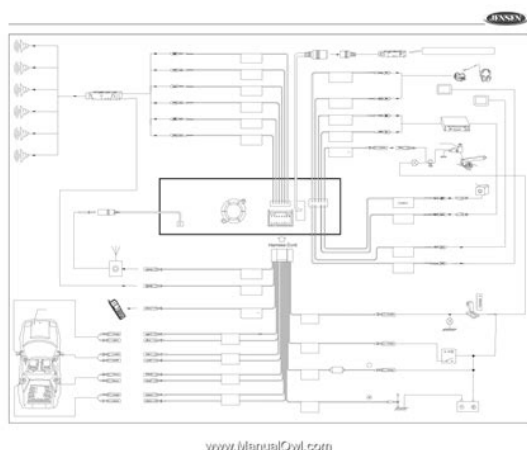

<http://www.drupalitalia.org/node/71287>

Krone IDC connectors are provided for the Central Bell and the External extension. The Central bell and the external extension are cabled with extension cabling. They are connected with a single pair a,b. See page 38. However if additional modules are being installed in a working system it is necessary to power the system down before installing an MDF or Backplane. If a Network module is replaced by the same type of module e.g. Analogue by Analogue, the switch will return to normal operation when the new module is inserted. If a Network Module is to be replaced by a different type of Network Module e.g. This PCB is NOT hot swappable. The System must be powered down to change this board. ESD precautions must be taken when replacing this board. The System must be powered down to change this board. ESD precautions must be made when replacing this board. Connect to the ESD. It is in a holder directly below the installed fuse 3.15A T. If there is no power being supplied to the unit check if the fuse is blown. 1. The System must be powered down to change this board. ESD precautions must be made when replacing this board. Connect to the ESD pillar on the CCU MDF before removing the CCU cover. The procedure to be used when replacing the CCU MDF unit is 1. Installation and Maintenance Manual Powerfail extension Extn 26 Extn 27 Extn 34 Extn 35 Extn 42 Extn 43 Extn 50 Extn 51 BT Versatility. Ensure that the following programming is done. Equipped exchange lines. The system assumes that all line cards have lines connected to them. These can be combined with Classes 1,2 and 3. Note As the BT Versatility can support both ISDN and Analogue, it may be necessary to enable features for ISDN and Analogue options on the same system. When the BT Versatility wizard is running select the Internet Module programming. Installation Wizard. The installation wizard allows you to quickly and easily set up an Internet connection.

<http://anapanic.com/images/bosch-sportline-washing-machine-manual.pdf>



The features should be explained by using the BT Versatility Quick Reference User Guide and the Getting Started User Guide. Ensure the customer has a Quick Reference User Guide for each extension, one copy of the. You may also choose programming mode and choose system, reset options, and reset. Reset to default To do a cold reset of the BT Versatility, enter programming mode and choose system, reset options, and reset to default. BT Versatility Owners Manual. BT Versatility 10 Introduction to your BT Versatility system System description.Versatility Telephone pdf manual download. All faults can normally be traced quite readily to a particular PCB. Prior to replacing any PCB, fault. Online user manual database BT Versatility. An introduction to the additional facilities provided in the View and Download BT BT Versatility instruction manual online. View Versatility user guide online, or download BT BT Versatility instruction manual for free. Program your BT Versatility Quickly and Easily. Need to Program your BT Versatility. Please use the BT user guide section to glance at the data sheets and user manuals for products from this manufacturer.Reload to refresh your session. Reload to refresh your session. Call 0800 849 4400 or click here Call 0800 849 5500 for help or click here Please click on the PDF Image to open the required document. We are an independent company who employ our own engineers. BT Maintained Customers who require the BT Versatility Helpdesk can reach them on 0870 240 8377. Please note, you must be a BT customer with a maintenance agreement before BT will agree to help you. This service is available to ALL UK Based Businesses. Charges are normally timerelated and the minimum charge is dependant on the location of your business. To set the time and date on the system follow these simple instructions From the Programming Extension. Below you will find all of the user manuals we have available for the BT Versatility Telephone.

<http://andeanpaths.com/images/bosch-sps-5122-service-manual.pdf>



British Telecom Versatility Telephone System. User Guide The BT Versatility V8 Featurephone and the BT Versatility is a flexible telephone system as the extensions can also be used with a standard telephones, answering. Offices Worldwide The telecommunications services described in this publication are subject to availability and may be modified from time to time. BT Versatility V8 Featurephone, this site will give you all the feature codes for the BT Versatility V8 Feature Telephone and you have manuals downloads from. BT Versatility Owners Manual 1 Contents Introduction to your BT Versatility System 7 System description bt versatility programming manual 7 System options 8 Using this handbook 9 To set the time and date on the system follow these simple instructions From the Programming Extension. BT Versatility Owners Manual 1 Contents Introduction to your BT Versatility System 7 System description bt versatility programming manual 7 System options 8 Using this handbook 9. The BT Versatility V8 Featurephone is the most popular telephone in the Versatility range. The Versatility V8 has a number of keys which are either programmed as line keys or Feature keys. This Item Includes a Full 12 Month Warranty, Including Line Cord, Curly Cord and Instruction Manual for its Features. This is a Genuine UK BT Versatility Handset refurbished to the highest standard. Product Information Starting from the top left you have a Secrecy Key which once pressed the caller can not hear your voice, so that allows you to talk to another colleague without letting the caller think that they are on hold. The next key is the Handsfree Key with a light indicator. This key does what it says it allows you to talk Handsfree, press it twice and the handsfree feature switches off. You then have a simple indicator on the far right which lights up when you have Voice Message. Please note The BT Versatility V8 Phone is only compatible with the BT Versatility Telephone system.

We are probably the cheapest site for the Versatility V8 phone especially considering the quality of our products surpasses that of our competitors. BT Versatility V8 Telephone Features Large display 8 programmable keys Full handsfree Message waiting light Data port Headset socket Wall mountable Whats Included BT Versatility Handset BT Versatility Line Cord Brand New BT Versatility Curly Cord Brand New Do you need help choosing the right Business Handset. When you spend over 200 exc. VAT we will ship your order FREE of Charge. We will not dispatch items if you do not have a physical address Orders will only be automatically dispatched within the UK. International Shipping to certain countries is available at an additional cost to our flat rate. You will always have

the opportunity to see the full amount of your purchase, including delivery charges, before you confirm your order. All orders are subject to fraud checks carried out by both our merchant bank and our own fraud scoring systems. When you place an order, you will also receive a confirmation email from us when your order is ready to ship. From this email you will also be able to check the status of your consignment with DPD who will provide tracking information. Why you should shop with The Headset Store Our website is fully encrypted to the with the highest 256 bit security standards where our entire site enjoys full and dedicated SSL Certification for full PCI compliance. We do not store your your credit card details. If you need help then our team are available from Monday to Thursday between 900am and 530pm GMT and on Friday between 900am and 430pm GMT Please call us on 01675 432 123 to discuss your order and any specific delivery instructions. Other reasons you should buy from us 14 Day Satisfaction Guarantee, so youll always find a headset youll love Genuine UK stock with 100% manufacturer warranty Lowest Price Guarantee No surcharges on credit cards.

<https://www.generalutilities.com/wp-content/plugins/formcraft/file-upload/server/content/files/1626c2bea616e6---canon-eos-40d-user-manual.pdf>

The Headset Store are an established and trusted Business Communications Supplier and we have extensive experience in our field When you buy from us we guarantee the following Complete Satisfaction when you order from us The Best Knowledge of Business Headsets We offer Next business day delivery on all orders We offer as standard a Full 12 Month Warranty Review us Through TrustPilot The Headset Store aim to provide the best possible service each and every time you place an order with us. We use Trustpilot which allows you to leave an open and honest review about your experience. In addition it has excellent hands free phone performance. The Versatility V8 phone has a high quality speaker phone giving high quality 2 way speech. The volume is easily adjusted using the up and down arrows keys. Everything you need can be accessed with just one key. Ideal for receptionists and other users who spend most of their time on the Phone. It will show the caller number and for callers listed in the directory, it can also display the caller name. Programmable keys let you set it up just the way you need. Any replacements made within the warranty period will continue to have a warranty that covers the original term from point of purchase. Please also note Any misuse, wear and tear or abuse of the goods will invalidate the warranty and any return postage will be payable by the customer. Our warranty excludes consumable products e.g. batteries. Our warranty is not applicable outside the United Kingdom unless by prearrangement. A 20 Admin fee will be charged for any item returned under warranty where no fault is found If the product fault is deemed to fall within the terms of the warranty then we reserve the right to repair, replace or credit faulty items at our discretion. If it is outside of the warranty period, we may offer a chance to repair the item at a cost to be quoted.

[chooset.com/galeria/files/connecticut-mastery-test-technical-manual.pdf](https://www.chooset.com/galeria/files/connecticut-mastery-test-technical-manual.pdf)

Please ensure that the Returns Number is clearly indicated on the parcel, as we cannot accept returns without this. PLEASE NOTE do not write on or mark the original packaging. DELIVERY INFO We aim to dispatch your goods on the same day we receive payment. In some cases it may take up to 1 working day for us to dispatch your purchase. Order cutoff time is 3PM. In case of urgency please contact us. We offer worldwide shipping. If you do not see the shipping information for a particular country then please contact us to request a shipping quote. DPD, Interlink and UPS deliveries MUST be signed for. Next working day delivery Royal mail 24h Tracked. Next working day delivery Royal mail 48h Tracked. Two working day delivery Royal mail economy delivery. Please note this delivery is not tracked. Delivered in 3 to 5 working Days. INTERNATIONAL SHIPPING IN THE EU UPS International Tracked standard service within the EU. Delivered in 34 working days. UPS International Tracked Express service within the EU. Delivered in 12 working days. INTERNATIONAL SHIPPING OUTSIDE THE EU UPS International Tracked standard service outside

the EU. Please request a quote for a speedier global delivery service. TRACKING INFO Once your order is shipped we will send you an email with a link to the tracking information. Depending on the progress of your order, you may receive between 14 emails per shipment on your order. We will use the email address you have provided on purchase. You are able to track the progress of your delivery by contacting the assigned courier via their website, you will need the tracking number and this will be found on the delivery email. You are able to arrange to pick up the unit from the courier depot then you will need to call the courier. If you want to call the courier then please use one of the telephone numbers below. Contact our team today and find out what help we can provide with your office telephones.

Services and equipment are provided subject to British T elecommunications plc's respective standard conditions of contract. Page 2 BT Versatility Installation and maintenance Manual Contents Introduction 2 Cabling the unit General overview 2 Safety Precautions during installation and system upgrades 3 Electrostatic precaution ESP 3 Lightning and surge voltage protection Installation checklist 6 Installing the Central Control Unit 7 CCU Location CCU 7 Mounting the CCU 7 CCU Mounting bracket clearances Mounting the CCU 9 Modules located in the CCU 10 Module location System Expansion 11 3 8 10 11 11 14 Installing the Analogue Page 3 BT Versatility Installation and maintenance Manual Introduction This document describes the practices to be adopted by field engineers during installation and maintenance of the BT Versatility. A more detailed description of the product, along with customer programmable facilities and features, may be found in the BT Versatility Owners Manual, which should be read in conjunction with this document. Page 4 BT Versatility Installation and Maintenance Manual Safety Precautions during installation and system upgrades Always unplug or isolate the mains supply when installing or upgrading the system. Page 5 BT Versatility Installation and maintenance Manual BT Versatility Packages, Spares and Maintenance Items BT Code BT Versatility Pro. It needs to be mounted at a convenient working height on a dry, flat wall. The normal height is 1.5 m from the floor to the bottom of the CCU case. Do not site the CCU where it will be subjected to excessive levels of heat, dust, damp or high humidity. Page 9 BT Versatility Installation and maintenance Manual CCU Mounting bracket clearances The main unit is mounted on a wall using the bracket supplied and should have top and side clearance as shown below. CCU Mounting Bracket 300mm If the system is to be equipped with a Ports, Options or Internet module then two mounting brackets need to be installed.

Page 10 BT Versatility Installation and Maintenance Manual Mounting the CCU The CCU is mounted on the bracket by sliding it on from the left hand side. The marks on the side of the CCU must be lined up with the flanges on the wall bracket as shown below before sliding the CCU into place. When you slide it fully to the righthand side of the bracket the CCU is automatically locked in place. This provides 2 Analogue exchange lines. This card provides one ISDN 2 Basic Rate Interface. The same module is used for the network T interface and the internal Sbus. Page 12 BT Versatility Installation and Maintenance Manual System Expansion To equip the switch with more than 8 extensions or to add an Internet or Options module, a backplane, mounted on a second wall bracket, is needed. The power must be disconnected to install the backplane or expansion modules. Installing the Backplane wall bracket The CCU and Backplane brackets are identical. However when both are installed the backplane bracket is inverted so that it meshes closely with the CCU bracket. Page 13 BT Versatility Installation and maintenance Manual Mounting the Backplane Slide the backplane on from the right hand side. Ensure the connector is fully mated with the CCU. This provides additional rigidity to ensure the backplane and CCU connectors do not move. Remove the fourth and fifth cover from the backplane. Locate the backplane on the bracket and connect it to the CCU. Page 14 BT Versatility Installation and Maintenance Manual Expansion Modules There are three types of expansion module that can be installed on the back plane. These are the Ports Module, the Internet Module and the Options Module. All these modules are installed in the same way. Modules are supplied in two parts. The MDF, which is connected to the backplane, and the module which is

inserted into the MDF. Page 15 BT Versatility Installation and maintenance Manual Installing an Expansion module Install the Backplane as described on page 12.

Install the MDF in the first free lefthand slot on the backplane. Lock the MDF in place by pushing the lock bar upward using a screwdriver. Push up to lock Lift the MDF cover and install the module. Page 16 BT Versatility Installation and Maintenance Manual Analogue line module The Analogue Line module contains circuitry for 2 Analogue Lines. The module is coloured BLACK and it can be installed in the CCU and also on the Ports MDF. Analogue Module Installing the Analogue Module in the CCU Remove the cover of the CCU. Insert the Analogue module in the Network slot or slots in the CCU. The module is coloured RED, and can be installed in the CCU and also in the Ports MDF. Installing the Basic Rate ISDN Module in the CCU Remove the cover of the CCU as shown. Page 19 BT Versatility Installation and maintenance Manual To Locate the Digital Line Module ISDN 2 in the PORTS module Remove the Ports Module by firstly opening the Ports MDF cover Open the Ports module and remove it from the MDF Insert the Digital Line Module or modules on the MDF connectors The upper slot is the first module position The top connector is for the first module that connects to the Network only. The lower connector is for the second module. Page 20 BT Versatility Installation and Maintenance Manual System ISDN settings The system can be configured with 8 Basic Rate ISDN interfaces. Half of these can be configured for internal Sbus operation. The second interface on the CCU and each of the Ports Modules can be programmed as Sbus interfaces for ISDN tothedesk. T0 interface termination An ISDN bus must be terminated twice, once at the start and once at the end of the bus. Page 21 BT Versatility Installation and maintenance Manual Voicemail module The Voice module is coloured BLUE It is located in the Voice Module slot in the CCU. There are two versions. Two Port with 2 hours capacity, 4 port with 4 hour capacity and 8 port with 20 hours capacity. A label identifies the 3 different modules.

The label location is indicated in the drawing below. The battery will support 11 erlangs of voice traffic for 40 minutes. An erlang is a measure of telephony traffic. This provides 32 additional programmable keys. From the system programming menus you program which extensions are equipped with this module. Page 29 BT Versatility Installation and maintenance Manual Clip, Plinth and installation of the V16 expansion console Cord Rail 15 cm cord RJ11 connector NOTE For the 20 degrees position or the 35 degrees position relate to page 26. Page 30 BT Versatility Installation and Maintenance Manual Wallmounting a Featurephone The phone plinth is inverted on the base to wall mount the phone. Locate, drill and plug the 2 screw locations as shown below. The holes should be deep enough to accept a 2.5 cm screw. Insert the two screws leaving sufficient space to clip the base over them. Locate the phone and base over the screws. Door Intercom The door intercom is connected to extension 23, the fourth extension on the CCU. Door intercom bracket Mounting screw Connect the single pair from the door intercom to the AB connections on extension 23. The system must be programmed to recognise the Door intercom. Page 32 BT Versatility Installation and Maintenance Manual Cabling the unit All Line and Extension circuit cabling is inserted from the top of the unit. There are breakouts as shown on the top of the unit to facilitate routing of cables into the MDF area. Cabling Break outs Connecting the extensions It is recommended that all extensions be cabled with 2 pairs. The Featurephones use all four wires and standard phones use the a,b pair only. Page 33 BT Versatility Installation and maintenance Manual Four wires per Extension are connected at the Main Equipment. Spare wires must be neatly laid back away from the connectors. To prevent cross talk or interference, cable pairs should not be split or the spare wire of cable pairs used.

All Extensions should connect into standard line jack units. Extension cabling should not be exposed to high voltage surges, for example, surges induced by lightning or neighbouring high current-carrying cables. Two lines are terminated on each connector. Three RJ 45 connectors for the Basic rate ISDN interfaces. Two T0 network connections and one Internal S0 connector. An RJ 45 for the ISDN Primary Rate interface PRI. See page 49 for basic router programming. Krone IDC

connectors are provided for the Central Bell and the External extension. They are connected with a single pair a,b. Page 38 BT Versatility Installation and Maintenance Manual Expanding an Existing system Modules may be removed and reinserted in a system without disconnecting the power. See page 38. However if additional modules are being installed in a working system it is necessary to power the system down before installing an MDF or Backplane. If additional network modules are to be installed in spare slots, the system needs to be reset before the switch recognises the new modules. Page 39 BT Versatility Installation and maintenance Manual Maintenance procedures Faults can be rectified on site by replacing faulty modules or PCBs Hot Swapping faulty modules The Network modules can be replaced without powering the system down. If a Network module is replaced by the same type of module e.g. Analogue by Analogue, the switch will return to normal operation when the new module is inserted If a Network Module is to be replaced by a different type of Network Module e.g. Page 40 BT Versatility Installation and Maintenance Manual Replacing a faulty Module MDF To replace a faulty MDF of a Ports, Internet or Options module the procedure is as follows 1. Remove the cabling from the MDF ensuring the cables are correctly tagged so they can be readily reinstalled. 2. Power the system down by unplugging it at the mains. 3. If a battery is installed turn off the BBU switch to disconnect the battery. 4.

<http://www.drupalitalia.org/node/71288>